

Dimensions

Model	A	B	C	D	E	F	G	H	L	M	N	O	
HPA 72 A035700400B#1	725	940	601	15	35	276	86,5	485	300	1 1/2\"BSP	400	250	180
HPA 135 A037500400B#1	1008	1300	706	25	27	390	114	675	500	SAE 3\"**	500	450	259
HPA 180 A032800400B#1	1008	1290	765	25	27	390	114	670	500	SAE 3\"**	500	450	278
HPA 255 A037900400B#1	1182	1310	949	25	27	477	114	680	500	SAE 3\"**	500	450	325


* Flange : SAE 3000

Technical data

Model	V	kW	A	Rpm	IP	dB(A)	lt	kg
HPA 72 A035700400B#1	230-400V 50Hz / 265-460V 60Hz	2,2 / 2,5	8,3 - 4,8 / 8,3 - 4,8	1435 / 1722	55	79 / 82	19	105
HPA 135 A037500400B#1	230-400V 50Hz / 265-460V 60Hz	3,0 / 3,5	12,1 - 7,0 / 12,1 - 7,0	969 / 1163	55	76 / 80	26	126
HPA 180 A032800400B#1	400-690V 50Hz / 460-795V 60Hz	7,5 / 8,6	14,4 - 8,3 / 14,4 - 8,3	1450 / 1740	55	85 / 89	31	200
HPA 255 A037900400B#1	400-690V 50Hz / 460-795V 60Hz	15 / 17,3	28,1 - 16,3 / 28,1 - 16,3	1456 / 1747	55	90 / 94	56	358

The noise levels are referred to the fan sound pressure @ 1mt

Performance diagram with oil ISO VG 32 @ 50°C

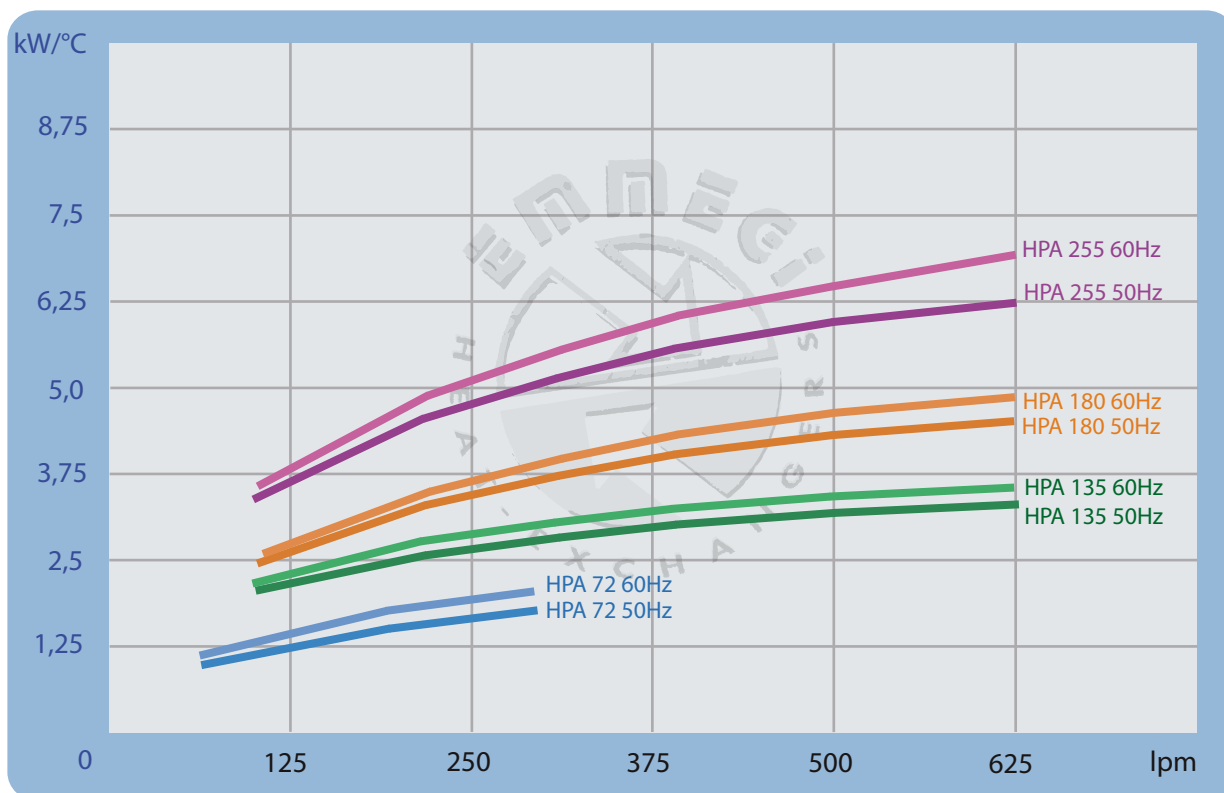

Pressure drop with oil ISO VG 32 @ 50°C

